

## Tactum 15DKP



### REMOTE CONTROL AND SUPERVISION

**Tactum 15DKP** is a new philosophy of remote control with built-in fanless CPU, it uses the whole multimedia power to drive conference room, control room and corporate environment. **Tactum 15DKP** can be used on a desktop. With its 13", 16/9 screen format and 1280 x 800 resolution, it displays stunning high resolution images.

It communicates with the MBC controllers by MBC bus or Ethernet IP.

Several composite video and audio inputs allows a multimedia display and communication.

2 USB ports are available for USB applications such as presentations, photo, video or for keyboard and mouse.

Ethernet link can be used to drive MBC controllers or directly some media/audio/video servers devices.

RS232 port can be used to directly drive routing switchers, videoprojector, ...

Equipped with a built-in hub it allows to connect several **Tactum 15DKP** without external hub so as to simplify the wiring.

**Tactum 15DKP** can be used as a web server and control your office by mobile phone.

Connected to the **CustoLan EIB** module, it can supervise a KNX bus installation.

### SPECIAL FEATURES

*Fanless:* For silent and low consumption

*Communication:* **MBC** bus and/or Ethernet

*Built-in hub :* To link several IP devices

*Loud speakers:* plays audio files thanks to its loud speakers.

*Multimedia I/O:* Composite video PAL/NTSC, audio, line.

*Auto-start front panel:* push button turns on/off the application

*Video input:* can display video sources

*Server:* Can be used as a web server - audio server

*Power supply:* can be powered from 10 to 15 VDC


*Table stand :* strong and multipositions

*Front panel:* Stainless inox and black glossy frame

### PRODUCT REFERENCES

Tactum 15DKP

**PC2MATY**  
application software

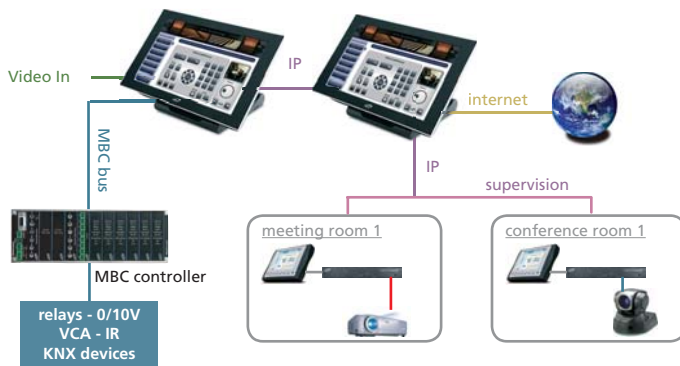

### SPECIFICATIONS

Screen	15.4" (39 cm) TFT color active matrix 16/9
Touch face plate	Resistive
Resolution	1280 x 800 WGA - 262144 colors
Brightness	450 cd/m <sup>2</sup>
Contrast ratio	600:1
Viewing angle	H: 160° x V: 110°
CPU	Intel® Celeron-M - 1 GHz
RAM	DDR SO-DIMM 512MB
Storage	2x CF card. optional: 40GB 2.5" HDD
Port	2x CF card
Communication	1x LAN 10/100 BaseT on RJ45 plug 1x HUB LAN on RJ45 1x RS232 on DB 9 1x MBC bus - 3 pins detachable phoenix connector 2x USB2
Audio	1x line in on 3.5 mm stereo mini-jack 1x micro in on 3.5 mm mini-jack 1x line out on 3.5 mm stereo mini-jack 2x 3w loudspeakers
Video	2x CV PAL/NTSC inputs - RCA F plug
Application software	<b>PC2MATY / FASTOCH FLH</b>
<b>POWER SUPPLY AND TEMPERATURE</b>	
Power supply	12VDC - 4A
Temperature	from 0°C to +50°C
<b>DIMENSIONS &amp; WEIGHT</b>	
Dimensions - W x H x D	385 x 255 x 64 mm (w/o foot)
Weight	6.1 kg
<b>OPTIONS</b>	
BRK 15DKP	onwall vesa mount